

INDUSTRIAL MOTORISED SIREN

2D

Mechanical Warning Siren

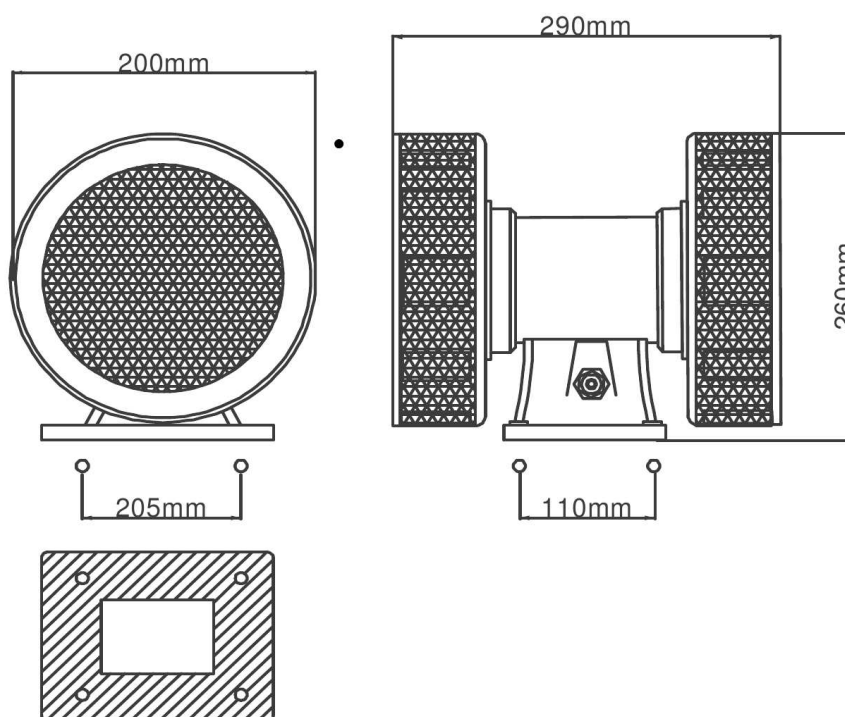
**AUSTRALIAN DESIGNED &
MANUFACTURED**


 Approx. 2 km Effective range	 126 dB(A) Sound Output @ 1m	 Continuous Duty cycle	 Aluminium Construction	 Double Impellers	 Global Delivery
--	---	---	--	--	---

PRODUCT OVERVIEW

The Sirenco 2D (model 2000D) is a compact mechanical warning siren for refineries, evacuation, fire warnings and open-cast mining operations. Its precision-manufactured aluminium construction and double impellers produce a penetrating low-frequency warning signal, with an approximate range of 2 km when mounted horizontally in an elevated position in still air.

TYPICAL APPLICATIONS


ENGINEERING DRAWING
240V SINGLE PHASE

SPECIFICATION DATA

PERFORMANCE	
Sound output	126 dB(A) @ 1m
Effective range	Approx. 2 km
Frequency	550 Hz
Duty cycle	Continuous
Motor rating	0.6kW
CONSTRUCTION	
Construction	Aluminium fabrication
IP rating	On request
Operation	Horizontal and level
Mounting	Robust base
DIMENSIONS	
Dimensions	200 × 290 × 260 mm
Weight	8 kg
Packaging size	36 × 30 × 36 cm
Shipping weight	15 kg
Mounting centres	110 × 205 mm

ELECTRICAL OPTIONS
240V Single Phase
PART NUMBER: 2000D

 Voltage
220/240V

 Phase
Single Phase

 Starting current
On request

 Frequency
50/60Hz

 Running current
3A
ORDERING INFORMATION

Part Number	Model	Voltage	Frequency	Phase
2000D	2D	220/240V	50/60 Hz	Single Phase